




Reservedele til

HOBART

2017

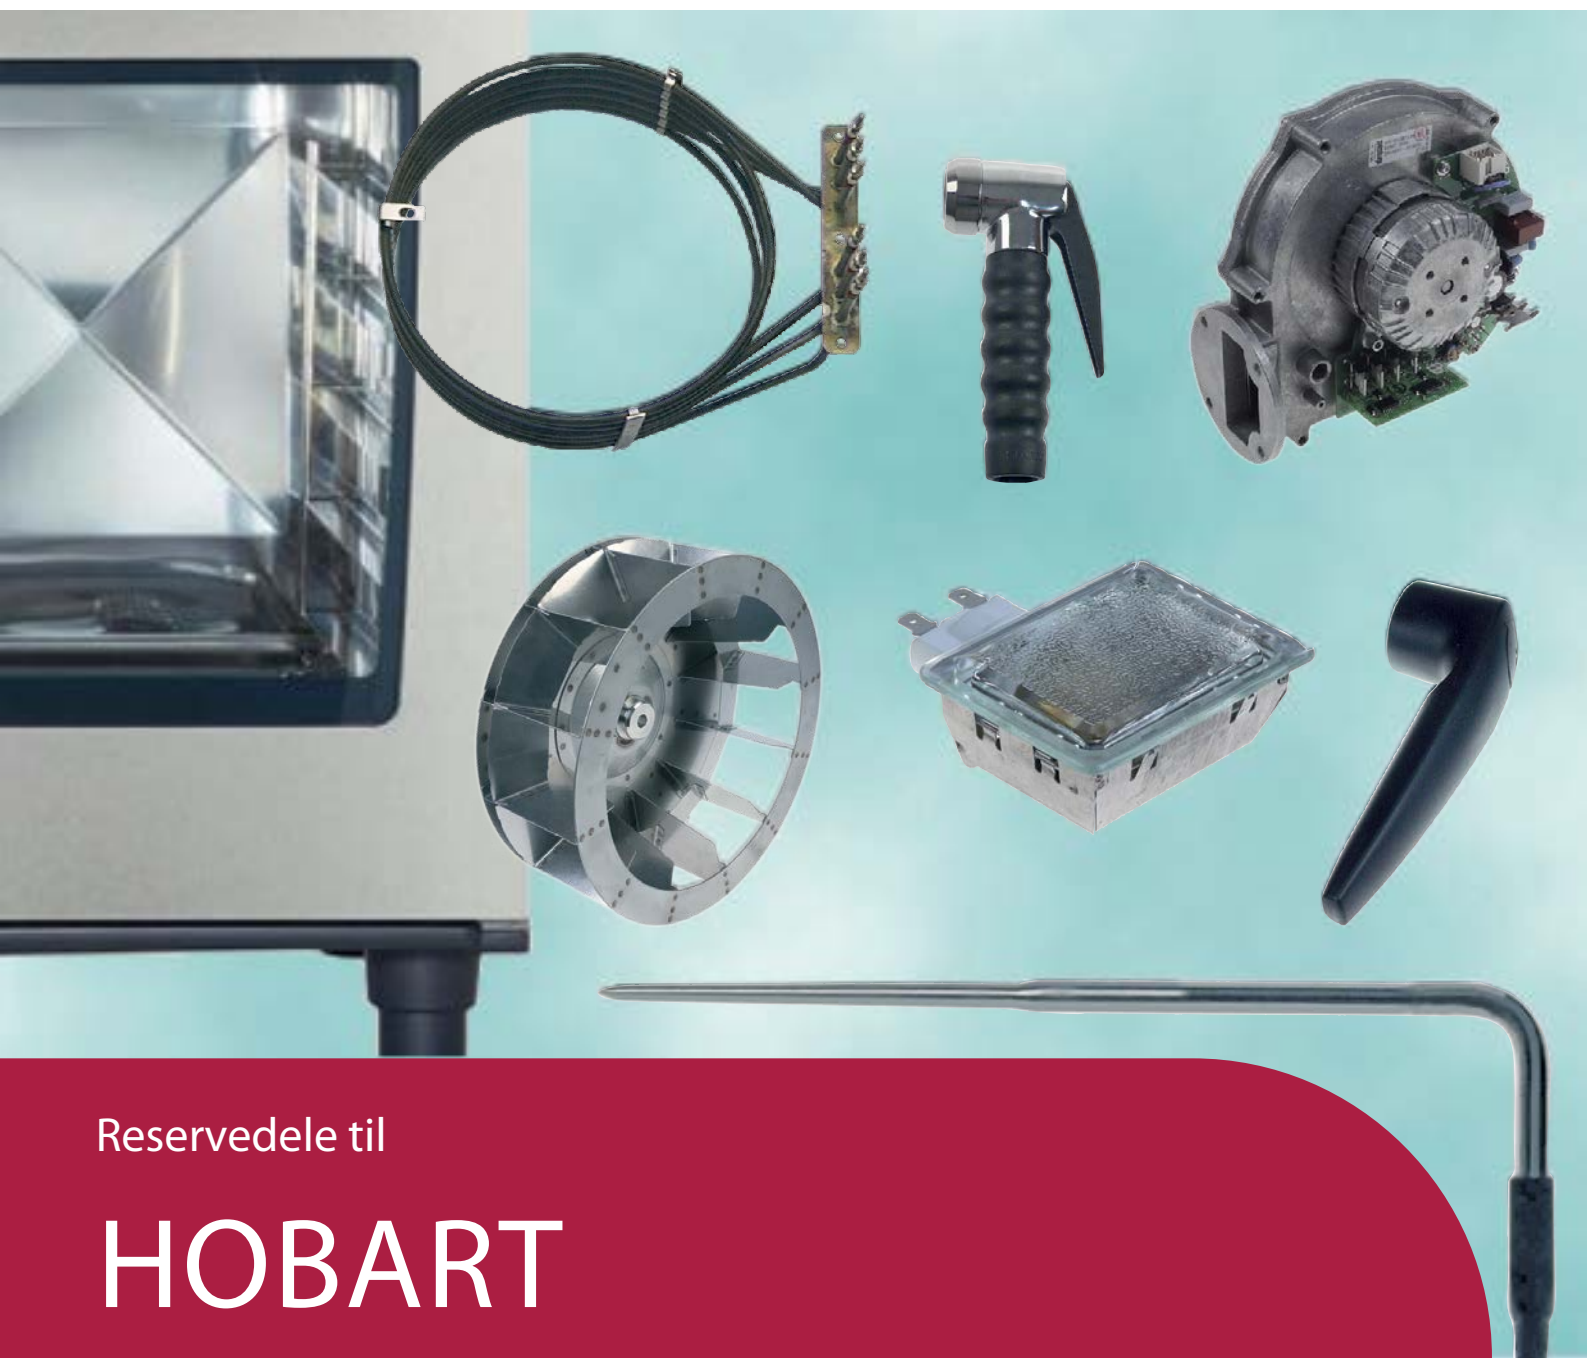

heating elements

immersion heating elements

miscellaneous



1

Vare nr.	416502	Ref. No.	322158 322158-04 322158-4 845370-01 845370-1
description	heating element 8000W 240V heating circuits 3 L 305mm W 40mm Hmm number of thermostat sleeves thermostat sleeves ømm length thermostat sleevesmm tube ø 6.3mm hole distance 44.9mm hole ø 10mm connection length 23mm connection male faston 6.3mm 4 hole flange immersion heater flange width 63.5mm flange length 63.5mm ø 40mm		
For models:	CO-0611E, CO-1011E, CO-2011E, CS-0611E, CS-0612E, CS-0612E-A, CS-1011E, CS-1012E, CS-1012E-A, CS-1022E, CS-1022E-A, CS-2011E, CS-2012E, CS-2012E-A, CS-2022E, CS-2022E-A, CSD-0611E, CSD-0612E, CSD-0612E-A, CSD-1011E, CSD-1012E, CSD-1012E-A, CSD-1022E, CSD-1022E-A, CSD-2011E, CSD-2012E, CSD-2012E-A, CSD-2022E, CSD-2022E-A		
accessories for	416502		
	Vare nr.	505180	Ref. No. 00-233982-001 00-276903-021 233982-1 276903-21
O-ring EPDM thickness 3.53mm ID ø 47.22mm Qty 1 pcs			

heating elements for convection




1

Vare nr.	418916	Ref. No.	845265-02 845265-1
description	heating element 12000W 240V heating circuits 3 ID ø 390mm ED ø 410mm L 410mm H 100mm H1 25mm H2 75mm thread M12x1 6 hole fixing connection male faston 6.3mm tube ø 8.5mm convection heating element		
For models:	CSL-10E, CSM-1011E, CSM-1011N, CSM-1021E, CSM-1021N, CSM-2021E, CSM-2021N		
accessories for	418916		
	Vare nr.	101566	Ref. No. —
nut thread M12x1 H 10mm WS 19 SS Qty 1 pcs			
	Vare nr.	506046	Ref. No. —
flat gasket FIBER ED ø 19.5mm ID ø 13mm thickness 2mm Qty 1 pcs			
	Vare nr.	528622	Ref. No. —
spring ø 15.3mm L 25mm wire gauge ø 1.25mm for water filling			



1

Vare nr.	418929	Ref. No.	845265-05
description	heating element 6000W 240V heating circuits 3 ID ø 395mm ED ø 415mm L 415mm H 100mm H1 15mm H2 85mm thread M12x1 6 hole fixing connection male faston 6.3mm tube ø 8.5mm convection oven convection heating element		
For models:	CSM-2011E, CSM-2011N		
accessories for	418929		
	Vare nr.	101566	Ref. No. —
nut thread M12x1 H 10mm WS 19 SS Qty 1 pcs			
	Vare nr.	506046	Ref. No. —
flat gasket FIBER ED ø 19.5mm ID ø 13mm thickness 2mm Qty 1 pcs			
	Vare nr.	528662	Ref. No. —
flat gasket copper ED ø 16mm ID ø 12mm thickness 1.5mm			



1

Vare nr.	418930	Ref. No.	845265-04
description	heating element 6000W 240V heating circuits 3 ID ø 430mm ED ø 450mm L 470mm H 115mm H1 43mm H2 72mm thread M12x1 6 hole fixing connection male faston 6.3mm tube ø 8.5mm convection oven convection heating element		
For models:	CSM-2011E, CSM-2011N		
accessories for	418930		
	Vare nr.	101566	Ref. No. —
nut thread M12x1 H 10mm WS 19 SS Qty 1 pcs			
	Vare nr.	506046	Ref. No. —
flat gasket FIBER ED ø 19.5mm ID ø 13mm thickness 2mm Qty 1 pcs			
	Vare nr.	528662	Ref. No. —
flat gasket copper ED ø 16mm ID ø 12mm thickness 1.5mm			

			
1			
Vare nr.	418926	Ref. No.	845265-03
description	heating element 8000W 240V heating circuits 3 ID ø 301mm ED ø 317mm L 328mm H 95mm L1 11mm H1 12mm H2 83mm thread M12x1 6 hole fixing connection male faston 6.3mm tube ø 8.5mm convection oven convection heating element		
For models:	CSL-06E, CSM-0611IE, CSM-0611N		

			
1			
Vare nr.	418925	Ref. No.	233848-2
description	heating element 1500W 230V heating circuits 1 L 293mm W 106mm L1 32mm L2 261mm W2 83mm flange length 50mm flange width 26mm connection length 63mm connection male faston 6.3mm tube ø 8.5mm hole ø 6.2mm W1 23mm convection heating element convection oven INCOLOY windings 2		
For models:	CO-0611E, CO-1011E, CO-2011E, CS-0611E, CS-1011E, CS-2011E, CSD-0611E, CSD-1011E, CSD-2011E		
accessories for	418925		
	Vare nr.	520588	Ref. No.
	 gasket L 46mm W 22mm hole distance 24.5mm silicone for heating element		

thermostats

control and safety thermostats

EGO

safety thermostats


55.32_ series

			
1			
Vare nr.	375984	Ref. No.	301061
description	safety thermostat switch-off temp. 225°C 3-pole 3NC 20A probe ø 6mm probe L 94mm capillary pipe 900mm capillary pipe isolated 670mm gland nut M10x1 probe SS		

56._ series

			
1			
Vare nr.	375442	Ref. No.	301066
description	safety thermostat capillary pipe 1760mm probe ø 4mm 1-pole probe L 100mm 16A capillary pipe isolated 1600mm gland nut switch-off temp. 320°C probe		

COTHERM

			
1			
Vare nr.	390440	Ref. No.	154344
description	safety thermostat t.max. 220°C temperature range°C 1-pole 1NC 25A probe ø 3mm probe L 130mm capillary pipe 1720mm capillary pipe isolatedmm gland nut switch-off temp. 220°C probe SS		

accessories

connecting bows

			
1			
Vare nr.	550060	Ref. No.	300177
description	connecting bow long for thermostat Qty 1 pcs		

switches and momentary switches

system switches (ROLD)

			
1			
Vare nr.	345606	Ref. No.	139321-455 E226071
description	momentary switch unit 2CO 250V 16A connection male faston 6.3mm		
For models:	CLG-25		



cam switches

operation switches




1

Vare nr.	300080	Ref. No.	491175
description	cam switch 2 operating positions 4NO 16A sequence 0-1 shaft ø 6x4.6mm shaft L 23mm connection screw operation switch ceramic ambient temperature max. 150°C		

magnetic switches


50x19mm

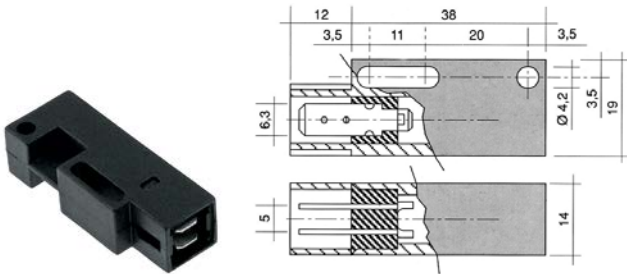

1

Vare nr.	345821	Ref. No.	775491-1
description	magnetic switch L 50mm W 19mm 1NO 250V 1A P max. 50W connection male faston 6.3mm		
For models:	AM-700, AM900, AMS900, AMX, AMX-900, AMX-E, AMX-ER, AMX-R, AMXR-900, AMXS-900, AMXX-1300, AMXXR-1300, AMXXS-1300, AMXXT, AUX, AUX-E, AUX-ER, AUX-R, AUXX-1300, AUXXL, AUXXR-1300, AUXXS-1300, AUXXT, CNA, CNR, ECOMAX-650, ECOMAX-700, FX, GX, UX-30, UX-30B, UX-30E, UX-30EB, UX-30EH, UX-30ES, UX-30ESB, UX-30ESH, UX-30H, UX-30-McDonalds, UX-30S, UX-30SB, UX-30SH, UXD-30		
accessories for	345821		
	Vare nr.	519049	Ref. No.
			—
	magnet ømm L 63mm H 10.7mm W 18.8mm hole distance 52mm M2 hole ø 2mm		

80x30mm

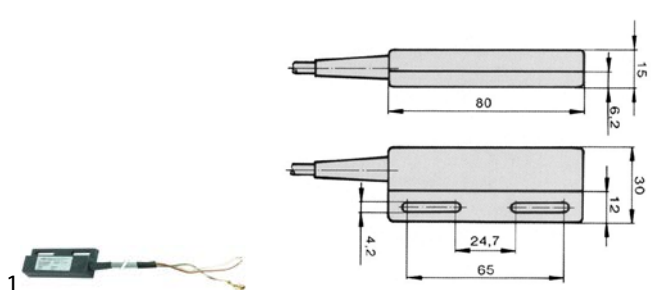

1

Vare nr.	345919	Ref. No.	297980-3
description	magnetic switch L 80mm W 30mm connection cable		
For models:	HX, HX-30E, HX-30ES, HX-40E, HX-40ES, HX-E, HX-ES, HX-S		

lamps

screw-on/push-on fit

halogen lamp

for socket G4 / G6.35 / G9



1

Vare nr.	357193	Ref. No.	1235342
description	halogen lamp socket G4 12V 20W temp.-resist. 300°C OSRAM HALOSTAR OVEN		

fluorescent lamps

fluorescent lamps

G23



1

Vare nr.	359933	Ref. No.	491761-001
description	fluorescent lamp socket G23 L 237mm 11W 230V		

oven lamps

lamps

halogen lamps

for socket G4 / G6.35 / G9



1

Vare nr.	357193	Ref. No.	1235342
description	halogen lamp socket G4 12V 20W temp.-resist. 300°C OSRAM HALOSTAR OVEN		

alarm devices

buzzers



1

Vare nr.	350050	Ref. No.	173864
description	buzzer 230VAC connection male faston 6.3mm screw mounting thread M4 60dB		

contactors

TELEMECANIQUE (Schneider Electric)

power contactors



1

Vare nr.	380976	Ref. No.	296926-2
description	power contactor resistive load 32A 230VAC (AC3/400V) 18A/7.5kW main contacts 3NO auxiliary contacts 1NO/1NC connection screw connection		

relays


power relays

with bracket mounting



1

Vare nr.	380702	Ref. No.	139321-528
description	power relays FINDER 230VAC 16A 3NO connection male faston 6.3mm flange dimensions 36x38x68mm manuf. no. 62.83.8.230.0300 230V		



1

Vare nr.	380185	Ref. No.	139321-686 371450-010
description	power relays Italiana Relè 230VAC 30A 1NO connection F6.3 bracket mounting dimensions 36.5x32.2x51.8mm manuf. no. A10-230AC-FA		

electronic controllers

LOREME

analogue



1

Vare nr.	379745	Ref. No.	480978 845246 845379-1
description	electronic controller kit LOREME type Dsl 94 mounting measurements 66x32mm 230V voltage AC TC/J 0-250°C display without display relay outputs 2 front measurements 70x34mm built-in depth 95mm cable length 2530mm probe L 20mm probe ø 4mm with probe and fastening material		
For models:	CSL-06E, CSL-10E, CSM-0611IE, CSM-0611N, CSM-1011IE, CSM-1011N, CSM-1021IE, CSM-1021N, CSM-2011IE, CSM-2011N, CSM-2021IE, CSM-2021N		
spare parts for	379745		
	Vare nr.	379744	Ref. No. 480974
	electronic controller LOREME type Dsl 94 mounting measurements 66x32mm 230V voltage AC TC/J 0-250°C display without display relay outputs 2 front measurements 70x34mm built-in depth 95mm		

electronics

PCBs



1

Vare nr.	403041	Ref. No.	00-895401-016 895401-16
description	PCB cable length 220mm with relay		

solenoïd valves

solenoïd valves (water)

ELBI

straight



1

Vare nr.	373017	Ref. No.	371450-021
description	solenoid valve single straight 230VAC inlet 3/4" outlet 11.5mm DN10 ELBI		
spare parts for	373017		
	Vare nr.	370467	Ref. No.
	solenoid valve filter suitable for ELBI		



MÜLLER

medium temperature: 90°C
duty cycle: 100%



1

Vare nr.	370003	Ref. No.	324208-4
description	solenoid valve double angled 230VAC inlet 3/4" outlet 14.5mm DN10 t.max. 90°C duty cycle 100% MÜLLER		
For models:	FX		
spare parts for	370003		
	Vare nr.	370128	Ref. No. —
	solenoid valve body double angled inlet 3/4" outlet 14.5mm DN10 t.max. 90°C duty cycle 100% MÜLLER 230V double-ways		
	Vare nr.	371002	Ref. No. —
	solenoid valve holder MÜLLER flange support		
	Vare nr.	371009	Ref. No. —
	compression spring for solenoid coil		
	Vare nr.	371011	Ref. No. —
	spare parts kit membrane with long star star hight 8mm MÜLLER		
	Vare nr.	371017	Ref. No. —
	solenoid coil MÜLLER 230VAC connection male faston 6.3mm		
	Vare nr.	371122	Ref. No. —
	solenoid valve filter ø 19mm H 10mm suitable for MÜLLER		
	Vare nr.	501161	Ref. No. —
	tap head for solenoid valve holder for solenoid coils		
accessories for	370003		
	Vare nr.	371010	Ref. No. —
	solenoid coil 230VAC connection with cable cable length 2000mm		
	Vare nr.	371037	Ref. No. —
	solenoid coil 24VAC 50/60Hz connection male faston 6.3mm		
	Vare nr.	371038	Ref. No. —
	solenoid coil 230VAC connection appliance plug		



1

Vare nr.	370001	Ref. No.	324207-1
description	solenoid valve single angled 230VAC inlet 3/4" outlet 14.5mm DN10 t.max. 90°C duty cycle 100% MÜLLER		
For models:	AM3, AMX, AMX-E, AMX-ER, AMX-R, AUX, AUX-E, AUX-ER, AUX-R, FE, FX, GX, HE, HE-P, HX, HX-30, HX-30E, HX-40, HX-40E, HX-60-EHL, HX-E, HX-ES, HX-S, UX-30, UX-30B, UX-30E, UX-30EB, UX-30EH, UX-30H, UX-30-McDonalds, UX-60, UX-60B, UX-60E, UX-60EB, UX-60EH, UX-60EHB, UX-60H, UX-60HB, UXD-30		
spare parts for	370001		
	Vare nr.	370126	Ref. No. —
	solenoid valve body single angled inlet 3/4" outlet 14.5mm DN10 t.max. 90°C duty cycle 100% MÜLLER plastic		
	Vare nr.	371002	Ref. No. —
	solenoid valve holder MÜLLER flange support		
	Vare nr.	371009	Ref. No. —
	compression spring for solenoid coil		
	Vare nr.	371011	Ref. No. —
	spare parts kit membrane with long star star hight 8mm MÜLLER		
	Vare nr.	371017	Ref. No. —
	solenoid coil MÜLLER 230VAC connection male faston 6.3mm		
	Vare nr.	371122	Ref. No. —
	solenoid valve filter ø 19mm H 10mm suitable for MÜLLER		
accessories for	370001		
	Vare nr.	371010	Ref. No. —
	solenoid coil 230VAC connection with cable cable length 2000mm		
	Vare nr.	371037	Ref. No. —
	solenoid coil 24VAC 50/60Hz connection male faston 6.3mm		
	Vare nr.	371038	Ref. No. —
	solenoid coil 230VAC connection appliance plug		

metal

ASCO

spare parts and accessories

kits




1

Vare nr.	371110	Ref. No.	173863-11
description	valve insert type A size 1/2" service kit		
For models:	2226, 2227, AM-12E, AM-12EC, AM-12EF, AM-12ER, AM-600, AM-600C, AM-600CR, AM-600R		


fans

hot air motors

1

Vare nr.	500812	Ref. No.	150443-54 233800-04
description	fan motor 220-240/380-415V 3 phase 50Hz 0.26kW 1440rpm speeds 1 D1 ø 17mm D2 ø 13.5mm		
For models:	CO-0612E, CO-1012E, CS-0612E, CS-1012E		

1


Vare nr.	601805	Ref. No.	844955-01
description	fan motor 230V 1 phase 50/60Hz 0.185kW 1400/1680rpm speeds 2 L1 130mm L2 27mm L3 37mm D1 ø 17mm D2 ø 13.5mm 1A suitable capacitor 5µF/450V Cos(φ) 0.93 type 1079GA2350		
accessories for	601805		
	Vare nr.	511605	Ref. No. 322190-1
	shaft seal		

hot air fans

ebm-papst



1



Vare nr.	601807	Ref. No.	494069
description	hot air fan kit 230V 50W L1 69mm L4 87mm fan wheel ø 151mm type RRL152/0020A92-3030LH-197 ebm-papst		

pumps

drain pumps

HANNING



1

Vare nr.	500042	Ref. No.	165653-1 old version
description	drain pump inlet ø 24mm outlet ø 24mm 230V 80W 50Hz HANNING type KD22B3-679		
spare parts for	500042		
	Vare nr.	510168	Ref. No. —
	fan wheel shaft intake ø 5mm ø 62mm H 14mm		



booster pumps II

accessories



1

Vare nr.	365017	Ref. No.	00-226568-009 01-235398 01-235399 139321-941 226568-9
description	operating capacitor capacity 5µF 450V tolerance 5% 50/60Hz ambient temperature max. -25 to +85°C ø 28mm L 54mm M8 plastic connection male faston 6.3mm 16.10.08 protection		
For models:	AMX, AMX-900, AMX-E, AMX-ER, AMX-R, AMXR-900, AMXS-900, AMXX-1300, AMXXR-1300, AMXXS-1300, AMXXT, AUX, AUX-E, AUX-ER, AUX-R, AUXX-1300, AUXXL, AUXXR-1300, AUXXS-1300, AUXXT, CHH-70D, ECOMAX-402, ECOMAX-650, ECOMAX-700, EH-70, FE, FE-W, FX, GX, HX-30, HX-30E, HX-30ES, HX-30S, HX-40, HX-40E, HX-40ES, HX-40S, UX, UX-30, UX-30B, UX-30E, UX-30EB, UX-30EH, UX-30ES, UX-30ESB, UX-30H, UX-30-McDonalds, UX-30S, UX-30SB, UX-60...(Other models you can see in the webshop)		

condensators & interference suppression filters

operating capacitors

plastic



1

Vare nr.	365165	Ref. No.	226568-008 226568-8
description	capacitor capacity 12.5µF 450V tolerance 5% 50Hz ambient temperature max. -25 to +85°C ø 35mm L 60mm M8 plastic connection male faston 6.3mm protection		
For models:	FE, FE-W, FX, GX, HE, HE600-HL, HE-P, HX, HX-30, HX-30E, HX-30ES, HX-30S, HX-40, HX-40E, HX-40ES, HX-40S, HX-60-EHL, HX-E, HX-ES, HX-S		



1

Vare nr.	365167	Ref. No.	226568-3
description	capacitor capacity 6µF 450V tolerance 5% 50Hz ambient temperature max. -25 to +85°C ø 30mm L 58mm M8 plastic connection male faston 6.3mm		
For models:	FE, G10R, G5R, HE-P, HX, HX-60-EHL, HX-E, HX-ES, HX-S, UX-30, UX-30B, UX-30E, UX-30EB, UX-30EH, UX-30ES, UX-30ESB, UX-30ESH, UX-30H, UX-30-McDonalds, UX-30S, UX-30SB, UX-30SH, UX-60, UX-60B, UX-60E, UX-60EB, UX-60EH, UX-60EHB, UX-60H, UX-60HB		



1

Vare nr.	365021	Ref. No.	00-226568-013 139321-448 139321-884 226568-13
description	operating capacitor capacity 16µF 425V tolerance 5% 50/60Hz ambient temperature max. -25 to +85°C ø 35mm L 73mm single M8 plastic connection male faston 6.3mm 416.10.99 protection		
For models:	AM-700, AM900, AM900-10N, AM900-90, AMS900, AMS900-10N, AMX, AMX-10HL, AMX-90, AMX-900, AMXR, AMXR-900, AMXS, AMXS-900, AMXT, AMXTS, CHF45, ECOMAX-600, ECOMAX-612-10, ECOMAX-612S-10, ECOMAX-650, EF-40		



1

Vare nr.	365017	Ref. No.	00-226568-009 01-235398 01-235399 139321-941 226568-9
description	operating capacitor capacity 5µF 450V tolerance 5% 50/60Hz ambient temperature max. -25 to +85°C ø 28mm L 54mm M8 plastic connection male faston 6.3mm 16.10.08 protection		
For models:	AMX, AMX-900, AMX-E, AMX-ER, AMX-R, AMXR-900, AMXS-900, AMXX-1300, AMXXR-1300, AMXXS-1300, AMXXT, AUX, AUX-E, AUX-ER, AUX-R, AUXX-1300, AUXXL, AUXXR-1300, AUXXS-1300, AUXXT, CHH-70D, ECOMAX-402, ECOMAX-650, ECOMAX-700, EH-70, FE, FE-W, FX, GX, HX-30, HX-30E, HX-30ES, HX-30S, HX-40, HX-40E, HX-40ES, HX-40S, UX, UX-30, UX-30B, UX-30E, UX-30EB, UX-30EH, UX-30ES, UX-30ESB, UX-30H, UX-30-McDonalds, UX-30S, UX-30SB, UX-60...(Other models you can see in the webshop)		



1

Vare nr.	365013	Ref. No.	226568-014 226568-14
description	operating capacitor capacity 8µF 400V tolerance 5%Hz ambient temperature max. -25 to +85°C ø 31.5mm L 55mm M8 plastic connection male faston 6.3mm protection		



fuses

fine fuses

			
1			
Vare nr.	358530	Ref. No.	139321-902
description	fine fuse size ø5x20mm 0.8A fast-acting rated 250V Qty 10 pcs		

			
1			
Vare nr.	358677	Ref. No.	139321-690 E228004
description	fine fuse size ø5x20mm 4A fast-acting rated 250V Qty 10 pcs		
For models:	CHH-50, CHH-60D, CHH-70D, EH-60, EH-70		

electric accessories

terminals

connection terminals with screw/faston connections

			
1			
Vare nr.	550411	Ref. No.	139321-582 774055-1
description	power terminal block 6-pole max. 40A max 450V connection ø6mm ² / F6.3 temp.-resist. 150°C cross section 6mm ²		
For models:	AMX-900, AMXS-900, AMXX-1300, AMXXT, AUXX-1300, AUXXT, CHF45, CHH-50, CHH-60D, CHH-70D, ECOMAX-650, EF-40, EH-60, EH-70, FE, FE-W, FX, GC, GC11, GC12, GC31, GC32, GC41, GC42, GX, HE, HE600-HL, HE-P, UX, UXL, UXLS, UXS, UXT, UXTH, UXTHL, UXTHLS, UXTHS, UXTL, UXTLS, UXTS		

auxiliary gas parts

screw connections

olives



1

Vare nr.	100898	Ref. No.	MRTCU800183
description	olive for pipe ø 6mm Qty 1 pcs for pilot burner		
accessories for	100898		
	Vare nr.	100909	Ref. No.
union screw thread M10x1 for pipe ø 6mm Qty 1 pcs			

equipment-specific units

for espresso machines

brewing units

filter holder gaskets

O-rings

			
1			
Vare nr.	510409	Ref. No.	00-276903-053 00-67500-016 00-67500-118 276903-53 670500-118 67500-16
description	O-ring EPDM thickness 5.34mm ID ø 56.52mm Qty 1 pcs		
For models:	CR-F, CX, ECW, EWB-S, FTN, FTT, FTX, FUX, ML-104674, ML-104683, ML-104686, UW-135, UW-135H, UWX, UX-60, UX-60B, UX-60E, UX-60EB, UX-60EH, UX-60EHB, UX-60H, UX-60HB, UXT, UXTH, UXTHL, UXTHLS, UXTHS, UXTL, UXTLH, UXTLHS, UXTLS, UXTS, V1401		

for convection ovens/combi-steamers

miscellaneous

			
1			
Vare nr.	698316	Ref. No.	491760
description	duct for glass plate D1 ø 10mm D2 ø 8mm rubber		
For models:	CO-0612E, CO-1012E, CS-0612E, CS-0612E-A, CS-1012E, CS-1012E-A, CS-1012G, CS-1022E, CS-1022E-A, CS-2012E, CS-2012E-A, CS-2012G, CS-2022E, CS-2022E-A, CSD-0612E, CSD-0612E-A, CSD-0612ET, CSD-0612-UC, CSD-1012E, CSD-1012E-A, CSD-1012ET, CSD-1012-UC, CSD-1013G, CSD-1022E, CSD-1022E-A, CSD-1022-UC, CSD-2012E, CSD-2012E-A, CSD-2012ET, CSD-2012-UC, CSD-2013G, CSD-2022E, CSD-2022E-A, CSD-2022-UC, CSL-0423E, CSL-0423EK, CSL-0523E, CSL-0523EK, CSL-06E, CSL-10E, CSL-423E, CSL-423K, CSM-0611IE, CSM-0611N, CSM-1011IE, CSM-1011N, CSM-1021IE, CSM-1021N, CSM-2011IE, CSM-2011N...(Other models you can see in the webshop)		

for dishwashers

drain and intake components

HOBART

drain /intake bodies

			
1			
Vare nr.	511677	Ref. No.	00-324053-000 00-886639-000
description	flange with gasket ED ø 107mm ID ø 70mm for pump		
For models:	CR-F, FE-W, FX, GC, GC11, GC12, GC31, GC32, GC41, GC42, GX, HX, HX-30, HX-30E, HX-30ES, HX-30S, HX-40, HX-40E, HX-40ES, HX-40S, HX-60-EHL, HX-E, HX-ES, HX-S		



overflow pipes



1

Vare nr.	510409	Ref. No.	00-276903-053 00-67500-016 00-67500-118 276903-53 670500-118 67500-16
description	O-ring EPDM thickness 5.34mm ID ø 56.52mm Qty 1 pcs		
For models:	CR-F, CX, ECW, EWB-S, FTN, FTT, FTX, FUX, ML-104674, ML-104683, ML-104686, UW-135, UW-135H, UWX, UX-60, UX-60B, UX-60E, UX-60EB, UX-60EH, UX-60EHB, UX-60H, UX-60HB, UXT, UXTH, UXTHL, UXTHLS, UXTHS, UXTL, UXTLH, UXTLHS, UXTLS, UXTS, V1401		

housing and bezels

miscellaneous



1

Vare nr.	513048	Ref. No.	00-886756-001 886756-1
description	duct ID ø 41mm ED ø 50mm		
For models:	AM-10, AM-11, AM-141, AM-700, AM900, AM900-10N, AM900-90, AMS900, AMS900-10N, AMX, AMX-10HL, AMX-90, AMX-900, AMX-E, AMX-ER, AMXR, AMX-R, AMXR-900, AMXS, AMXS-900, AMXT, AMXTS, AMXX, AMXX-1300, AMXXR, AMXXR-1300, AMXXS, AMXXS-1300, AMXXT, AUP, AUP-90, AUPS, AUX, AUX-E, AUX-ER, AUX-R, AUXX, AUXX-1300, AUXXL, AUXXL-11N, AUXXLS-11N, AUXXR, AUXXR-1300, AUXXS, AUXXS-1300, AUXXT, AUXXTS, CN-Protronic, CN-Smartronic, CS-Easytronic...(Other models you can see in the webshop)		

locks

miscellaneous




1

Vare nr.	696420	Ref. No.	03811C
description	door catch with microswitch L 80mm W 46mm mounting distance 60mm		
spare parts for	696420		
	Vare nr.	347567	Ref. No. —
	momentary push switch mounting ø 12mm white 1NO 250V 4A connection male faston 6.3mm ambient temperature max. 85°C protection IP40		

gaskets


gaskets for heated units

door seals



1

Vare nr.	901417	Ref. No.	492439 845052
description	door seal profile 2215 L 2010mm suitable for HOBART Qty 1		
For models:	CO-0612E, CS-0612E, CS-0612E-A, CSD-0612E, CSD-0612E-A, CSD-0612-UC, CSL-06E, CSM-0611IE, CSM-0611N		




1

Vare nr.	901366	Ref. No.	492466
description	door seal profile 2215 L 2530mm Qty 1 suitable for HOBART		
For models:	CO-1012E, CS-1012E, CS-1012E-A, CS-1012G, CS-1022E, CS-1022E-A, CSD-1012E, CSD-1012E-A, CSD-1012-UC, CSD-1013G, CSD-1022E, CSD-1022E-A, CSD-1022-UC, CSL-10E, CSM-1011IE, CSM-1011N, CSM-1021IE, CSM-1021N		



1

Vare nr.	902444	Ref. No.	01-235313 1235313 162007
description	door seal profile 2510 W 670mm L 775mm external size		




1


Vare nr.	518126	Ref. No.	492455
description	door seal profile 2980 L 2820mm		
For models:	CO-1012E, CS-1012E, CS-1012E-A, CS-1022E, CS-1022E-A, CSD-1012E, CSD-1012E-A, CSD-1013G, CSD-1022E, CSD-1022E-A, CSL-10E, CSM-1011IE, CSM-1011N, CSM-1021IE, CSM-1021N		

O-rings

EPDM



Vare nr.	510419	Ref. No.	00-276903-019 276903-19
description	O-ring EPDM thickness 3mm ID ø 150mm Qty 1 pcs		
For models:	FE-W, FX, GX, HX, HX-30, HX-30E, HX-30ES, HX-30S, HX-40, HX-40E, HX-40ES, HX-40S, HX-60-EHL, HX-E, HX-ES, HX-S		



Vare nr.	510409	Ref. No.	00-276903-053 00-67500-016 00-67500-118 276903-53 670500-118 67500-16
description	O-ring EPDM thickness 5.34mm ID ø 56.52mm Qty 1 pcs		
For models:	CR-F, CX, ECW, EWB-S, FTN, FTT, FTX, FUX, ML-104674, ML-104683, ML-104686, UW-135, UW-135H, UWX, UX-60, UX-60B, UX-60E, UX-60EB, UX-60EH, UX-60EHB, UX-60H, UX-60HB, UXT, UXTH, UXTHL, UXTHLS, UXTHS, UXTL, UXTLH, UXTLHS, UXTLS, UXTS, V1401		

shaft gaskets

miscellaneous



Vare nr.	511605	Ref. No.	322190-1
description	shaft seal		
For models:	CO-0611E, CO-1011E, CO-2011E, CS-0611E, CS-0612E-A, CS-1011E, CS-1012E-A, CS-1022E-A, CS-2011E, CS-2012E-A, CS-2022E-A, CSD-0611E, CSD-0612E-A, CSD-0612ET, CSD-1011E, CSD-1012E-A, CSD-1012ET, CSD-1022E-A, CSD-2011E, CSD-2012E-A, CSD-2012ET, CSD-2022E-A		

special gaskets

miscellaneous



Vare nr.	511600	Ref. No.	844617
description	gasket ED ø 80mm		
For models:	CS-0612E, CS-0612E-A, CS-1012E, CS-1012E-A, CS-1012G, CS-1022E, CS-1022E-A, CS-2012E, CS-2012E-A, CS-2012G, CS-2022E, CS-2022E-A, CSD-0612E, CSD-0612E-A, CSD-1012E, CSD-1012E-A, CSD-1013G, CSD-1022E, CSD-1022E-A, CSD-2012E, CSD-2012E-A, CSD-2013G, CSD-2022E, CSD-2022E-A, CSL-06E, CSL-10E, CSM-0611IE, CSM-0611N, CSM-1011IE, CSM-1011N, CSM-1021IE, CSM-1021N, CSM-2011IE, CSM-2011N, CSM-2021IE, CSM-2021N		

hoses

supply hoses

PVC supply hoses



Vare nr.	520011	Ref. No.	139321-1030 139321-1034
description	supply hose PVC straight-curved DN13 connections 3/4" L 2000mm operating p. 10bar burst p. 32bar t.max. 90°C approval VDE flat seal		

fastening material

screws

hexagonal screws



Vare nr.	550528	Ref. No.	00-609782-000
description	safety screw thread M5 WS 8 Qty 10 pcs L 8mm head ø 11mm		



consumables

fuses

fine fuses



1

Vare nr.	358530	Ref. No.	139321-902
description	fine fuse size ø5x20mm 0.8A fast-acting rated 250V Qty 10 pcs		



1

Vare nr.	358677	Ref. No.	139321-690 E228004
description	fine fuse size ø5x20mm 4A fast-acting rated 250V Qty 10 pcs		
For models:	CHH-50, CHH-60D, CHH-70D, EH-60, EH-70		

A

alarm devices	4
---------------	---

B

booster pumps II	8
------------------	---

C

cam switches	4
--------------	---

condensators & interference suppression filters	8
---	---

consumables	12
-------------	----

contactors	5
------------	---

D

door seals	10
------------	----

drain pumps	7
-------------	---

E

electric accessories	9
----------------------	---

electronic controllers	5
------------------------	---

F

fans	7
------	---

fastening material	11
--------------------	----

fine fuses	12
------------	----

fluorescent lamps	4, 4
-------------------	------

fuses	9, 12
-------	-------

G

gaskets for heated units	10
--------------------------	----

H

halogen lamp	4
--------------	---

heating elements	2
------------------	---

heating elements for convection	2
---------------------------------	---

hexagonal screws	11
------------------	----

hoses	11
-------	----

hot air fans	7
--------------	---

hot air motors	7
----------------	---

I

immersion heating elements	2
----------------------------	---

L

lamps	4
-------	---

M

magnetic switches	4
-------------------	---

O

operating capacitors	8
----------------------	---

O-rings	11
---------	----

oven lamps	4
------------	---

P

pumps	7
-------	---

PVC supply hoses	11
------------------	----

R

relays	5
--------	---

S

safety thermostats	3
--------------------	---

screws	11
--------	----

shaft gaskets	11
---------------	----

solenoid valves	5
-----------------	---

supply hoses	11
--------------	----

switches and momentary switches	3
---------------------------------	---

system switches (ROLD)	3
------------------------	---

T

terminals	9
-----------	---

thermostats	3
-------------	---